




F9 - 4 x 1000 mL Carbon Fiber Centrifuge Rotor		
RPM	MAX RCF	k factor
9000	15241	3127
8000	12042	3958
7500	10584	4503
7000	9220	5169
6500	7950	5995
6000	6774	7036
5500	5692	8374
5000	4704	10132
4500	3810	12509
4000	3011	15831
3500	2305	20678
3000	1693	28145
2500	1176	40529
2000	753	63326
1500	423	112579
1000	188	253303
500	47	1013213

422 Aldo Avenue, Santa Clara, CA. 95054-2301
800.784.3843 - Fax 408.988.1196
www.piramoon.com

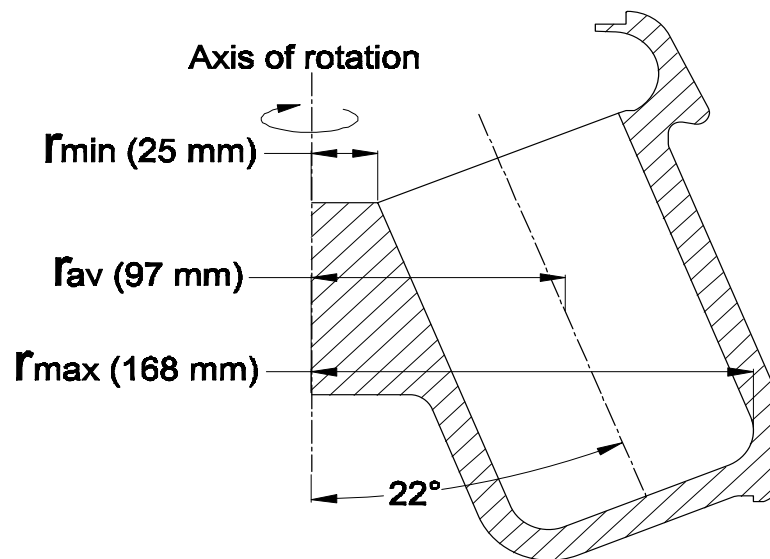

- Limited Lifetime Warranty!
- Corrosion free
- Up to 60% lighter than metallic equivalents
- Highly resistant to radiolabel contamination
- Compatible with all popular floor model centrifuges.
- No need for derating after years of use
- Fully autoclavable
- Superior insulating properties, making chilling unnecessary
- Competitively priced at or below the cost of conventional metallic rotors

Offering the rewards of 40 years of aerospace R&D to scientists and researchers everywhere. Not only is carbon fiber at the cutting edge of technology, it is also the most sensible and safe alternative to the standard aluminum and titanium alloys used today for all centrifugation rotors. With properties matching those of steel, but without the negative attributes, carbon fiber is leagues ahead of metal in regards to strength, weight, and malleability. Please contact FIBERLite for further product information.